

PODŁOGA PODNIESIONA MONOLITYCZNA - RAISED ACCESS FLOORS

TONGUE&GROOVE


 = 60 x 60 cm

TONGUE&GROOVE


- > **Calcium sulphate high density**
- > **Covering:** PVC rubber, Linoleum, Carpet, Ceramic tiles, Marble, Granite, Parquet.



H 30,5/36,5 mm

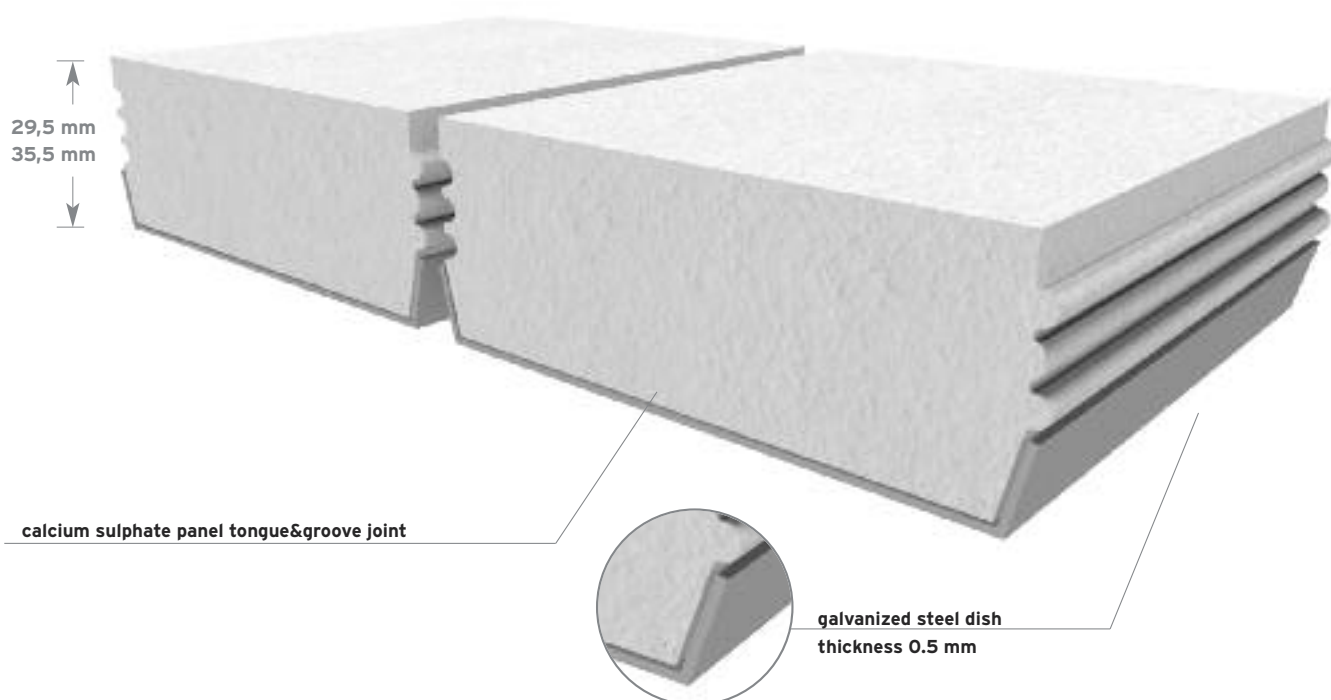

TECHNICAL SPECIFICATIONS

		CBI30TG	CBI36TG
thickness		30,5 mm	36,5 mm
	fire reaction UNI EN 13501-1	A1	A1
	fire resistance UNI EN 13501-2	REI 30	REI 60

TECHNICAL FEATURES UNI EN 12825

		CBI30TG	CBI36TG
	center of panel - deflection 2,5 mm	4,7 kN	5,6 kN
	center of panel - ultimate load	9,7 kN	11,2 kN
	loading class	4	5
	center of panel - deflection 2,5 mm	4,8 kN	5,9 kN
	center of panel - ultimate load	9,8 kN	11,8 kN
	loading class	4	5
	center of panel - deflection 2,5 mm	5,2 kN	6,2 kN
	center of panel - ultimate load	10,7 kN	12,3 kN
	loading class	5	6

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.

