

PODŁOGA PODNIESIONA MONOLITYCZNA - RAISED ACCESS FLOORS

TONGUE&GROOVE



= 60 x 60 cm


TONGUE&GROOVE

- › Calcium sulphate high density ·
- › **Covering:** PVC rubber, Linoleum, Carpet, Ceramic tiles, Marble, Granite, Parquet.




TONGUE
&GROOVE

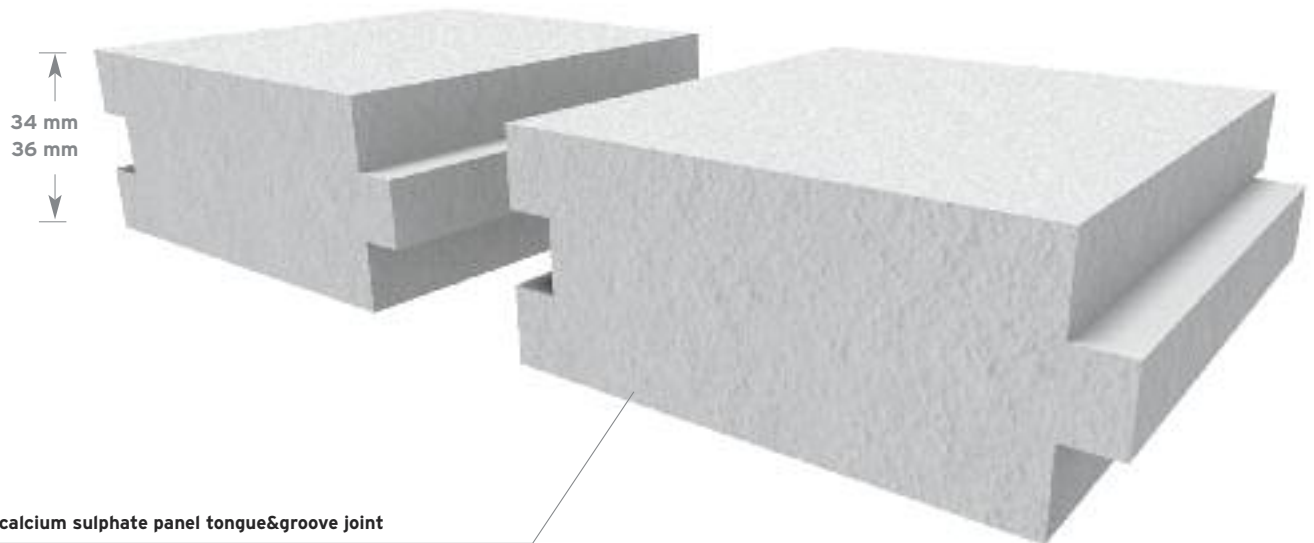


H 34/36 mm



TECHNICAL SPECIFICATIONS

		PS34TG	PS36TG
thickness		34 mm	34 mm
	fire reaction UNI EN 13501-1	A1	A1
	fire resistance UNI EN 13501-2	REI 30	REI 60

TECHNICAL FEATURES UNI EN 12825

	center of panel - deflection 2,5 mm	4,8 kN	5,5 kN
	center of panel - ultimate load	6,1 kN	6,9 kN
	loading class	2	2
	center of panel - deflection 2,5 mm	5,0 kN	5,8 kN
	center of panel - ultimate load	6,4 kN	7,2 kN
	loading class	2	2
	center of panel - deflection 2,5 mm	5,3 kN	6,0 kN
	center of panel - ultimate load	6,7 kN	7,6 kN
	loading class	2	2

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.

